$\lambda J \lambda X$

Baseline product line

Ajax SpaceControl Jeweller


Wireless key fob for Ajax system control.



2 GRADE EN 50131





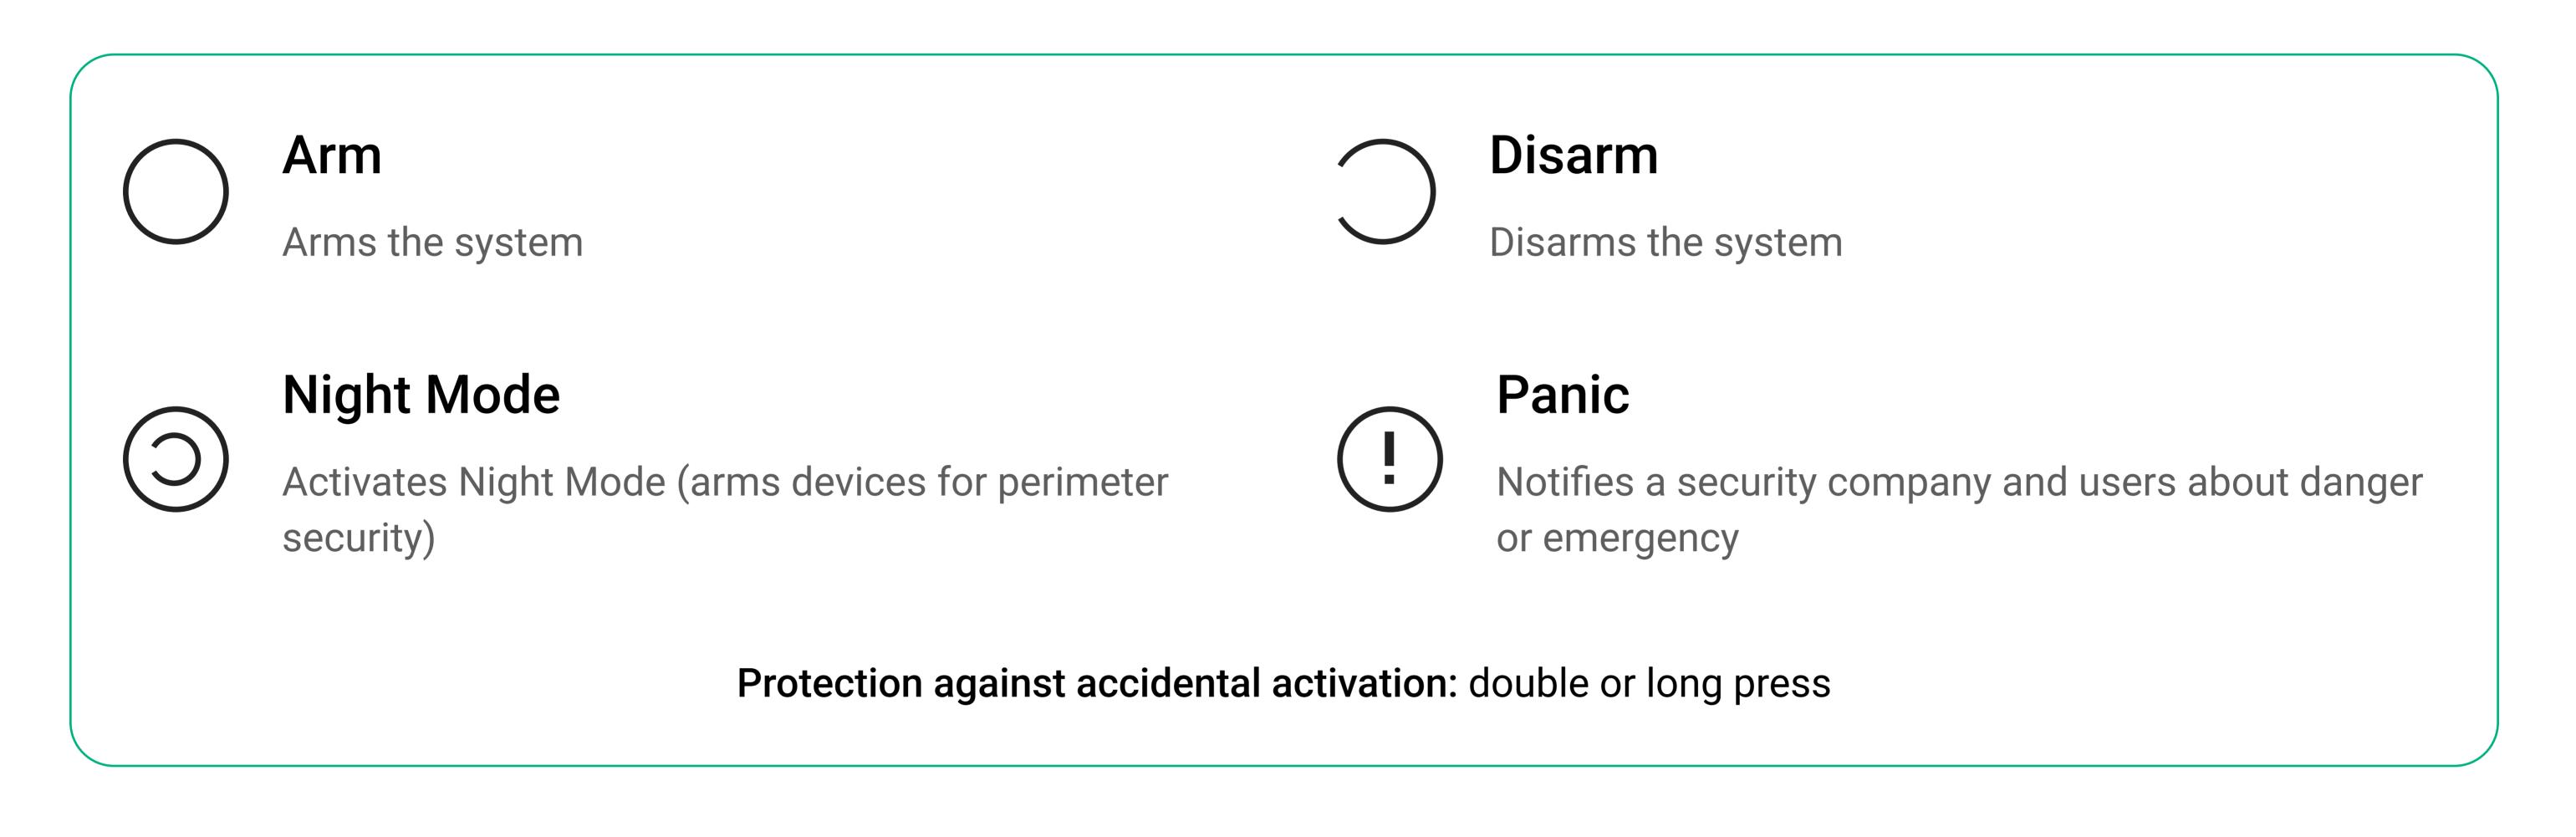



- Up to 1,300 m of radio communication in an open space
- Encryption and device authentication to prevent spoofing
- Indication of command execution by LED



- Up to 5 years of operation
- Pre-installed replaceable battery
- Low battery warning



- Pairing with a hub via QR code
- Remote control and configuration in the app
- It can be carried around in a pocket or on the key ring

Compliance

EN 50131 (Grade 2) PD 6662:2017

Compatibility

Hubs

Hub, Hub Plus, Hub 2 (2G), Hub 2 (4G), Hub 2 Plus, Hub Hybrid (2G), Hub Hybrid (4G)

Range extenders ReX, ReX 2

Communication with control panel

Jeweller communication technology

Frequency bands 866.0-866.5 MHz 868.0-868.6 MHz 868.7-869.2 MHz 905.0-926.5 MHz 915.85-926.5 MHz 921.0-922.0 MHz Depends on the region of sales.

Jeweller communication range

Power supply

Battery 1 × CR2032 Pre-installed.

Battery life up to 5 years

	In an open space.	
Enclosure	Complete set	
Colour	Ajax SpaceControl Jeweller	
white	1 × CR2032 battery (pre-installed)	
black	Quick start guide	
Dimensions		
65 × 37 × 10 mm		
Weight		
13 g		
	Colour white black Dimensions 65 × 37 × 10 mm Weight	In an open space. Enclosure Complete set Colour Ajax SpaceControl Jeweller white 1 × CR2032 battery (pre-installed) black Quick start guide Dimensions 65 × 37 × 10 mm Weight Image: Start Space Control Jeweller



For detailed information, scan the QR code or follow the link:

support.ajax.systems/en/manuals/ajaxspacecontrol



- @AjaxSystemsSupport_Bot
- ajax.systems